

SURTRON 50D

SAFETY
 EN60601-1
 EN60601-1-2
 EN60601-2-2
 Electrical Class: I CF
 MDR 2017/745/UE Class: II b

CONTROLS
 Output power monitoring
 Self check control



SURTRON® 50D is a radiofrequency electrocautery unit suitable for minor monopolar surgery.

SURTRON® 50D through the functions selection makes pure cut, cut coagulation (CUT 1 - CUT 2) and pure coagulation possible.

The on-board microcontroller and digital display guarantees consistent safety and reliability under any conditions.

SURTRON® 50D offers outstanding professional surgical results due to its ergonomic and superior safety features.

SCAN HERE




READ MORE

50D

| | |
|--------------------------------|--------------|
| Reference code | 10100.051 |
| Maximum output power CUT | 50 W - 400 Ω |
| Maximum output power CUT/COAG1 | 45 W - 400 Ω |
| Maximum output power CUT/COAG2 | 40 W - 400 Ω |
| Maximum output power COAG | 40 W - 400 Ω |
| Working frequency | 600 kHz |
| Patient circuit | F |
| Selectable input voltage | 115/230 Vac |
| Mains frequency | 50-60 Hz |
| Electrical input power | 280 VA |
| Size WxHxD mm | 190x85x239 |
| Weight | 2,5 Kgs |

STANDARD COMPOSITION:

- Reusable monopolar handle 00206.00
- Assorted electrodes (10 pcs) 00500.00
- Cable for rod neutral electrode 00404.02
- Rod neutral electrode 00403.01
- Foot switch 00304.00
- Power supply cable 2 mt 00100.03
- Electrodes and handle support 00202.00

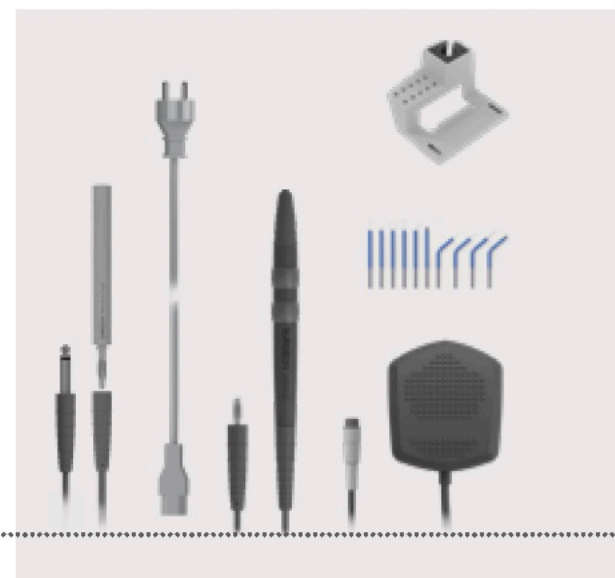

AMBULATORY SURGERY - DENTAL