

SURTRON 80D

SCAN HERE



READ MORE



SURTRON® 80D is a radiofrequency electrocautery unit suitable for minor monopolar surgery.

SURTRON® 80D has a multi-function selector which makes cutting (CUT), cut coagulation (BLEND), coagulation (COAG) and micro-coagulation (MICRO) possible.

The one-board microcontroller and digital display guarantees consistent safety and reliability under any conditions.

SURTRON® 80D offers outstanding professional surgical results due to its ergonomic and superior safety features.

SAFETY

EN60601-1
EN60601-1-2
EN60601-2-2
Electrical Class: I CF
MDR 2017/745/UE Class: II b

CONTROLS


Patient/Plate circuit monitoring
Output power monitoring
Self check control

80D

Reference code	10100.081
Maximum output power CUT	80 W - 400 Ω
Maximum output power BLEND	60 W - 400 Ω
Maximum output power COAG	50 W - 400 Ω
Maximum output power MICRO	20 W - 600 Ω
Working frequency	700 kHz
Patient circuit	F
Selectable input voltage	115-230 Vac
Mains frequency	50-60 Hz
Electrical input power	280 VA
Size WxHxD mm	190x85x239
Weight	2,5 Kgs

STANDARD COMPOSITION:

- Reusable monopolar handle 00206.00
- Assorted electrodes (10 pcs) 00500.00
- Cable for neutral electrode 00404.08
- Steel neutral electrode 5365
- Foot switch 00304.00
- Power supply cable 2 mt 00100.03
- Electrodes and handle support 00202.00

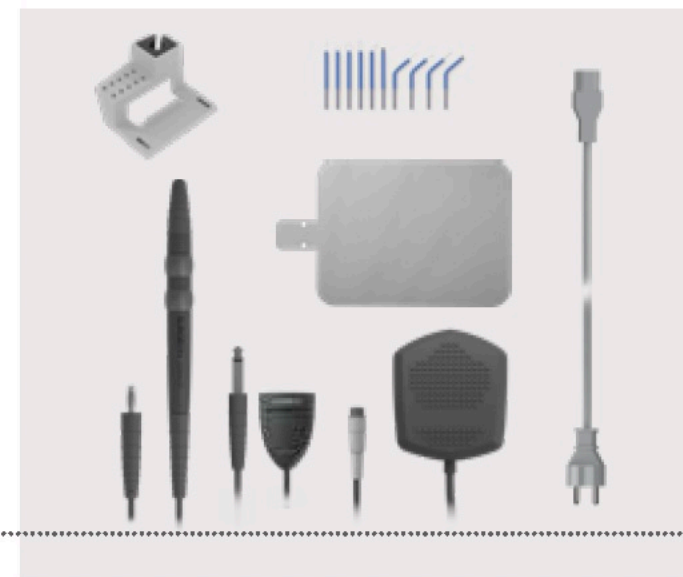

DERMATOLOGY - FIRST AID - VASCULAR SURGERY

